


40x40x07mm




■ P-Q Curve (At Rated Voltage)

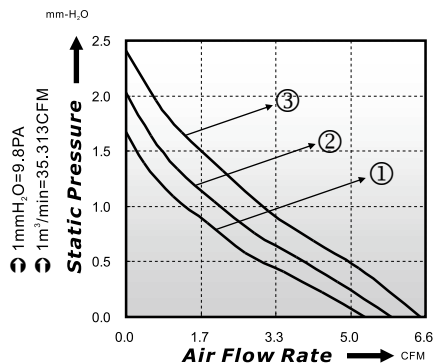

■ Dimensions Drawing

Unit: (mm)

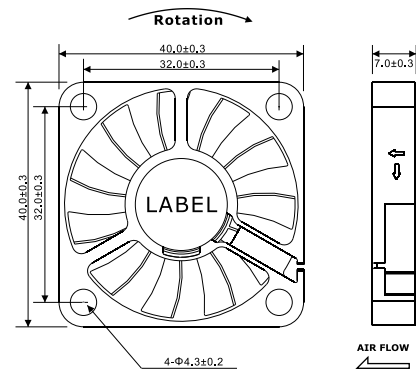

| Model No | Bearing (*) | Rated Voltage (VDC) | Rated Current (A) | Power Consumption (Watts) | Speed (rpm) | Air Flow (CFM) | Static Pressure (mmH ₂ O) | Noise (dBA) | Curve |
|--------------|-------------|---------------------|-------------------|---------------------------|-------------|----------------|--------------------------------------|-------------|-------|
| ED04007-03L* | ○ ● ⊖ | 3 | 0.35 | 1.05 | 5000 | 5.26 | 1.67 | 28.5 | 1 |
| ED04007-03M* | ○ ● ⊖ | 3 | 0.45 | 1.35 | 5500 | 5.84 | 2.03 | 29.9 | 2 |
| ED04007-03H* | ○ ● ⊖ | 3 | 0.55 | 1.65 | 6000 | 6.48 | 2.41 | 31.6 | 3 |
| ED04007-05L* | ○ ● ⊖ | 5 | 0.25 | 1.25 | 5000 | 5.26 | 1.67 | 28.5 | 1 |
| ED04007-05M* | ○ ● ⊖ | 5 | 0.35 | 1.75 | 5500 | 5.84 | 2.03 | 29.9 | 2 |
| ED04007-05H* | ○ ● ⊖ | 5 | 0.45 | 2.25 | 6000 | 6.48 | 2.41 | 31.6 | 3 |
| ED04007-12L* | ○ ● ⊖ | 12 | 0.20 | 2.40 | 5000 | 5.26 | 1.67 | 28.5 | 1 |
| ED04007-12M* | ○ ● ⊖ | 12 | 0.30 | 3.60 | 5500 | 5.84 | 2.03 | 29.9 | 2 |
| ED04007-12H* | ○ ● ⊖ | 12 | 0.40 | 4.80 | 6000 | 6.48 | 2.41 | 31.6 | 3 |

* Bearing Type: ○ Sleeve ● Two Ball ⊖ Hydro-Dynamic