


40x40x10mm

■ Model E




■ P-Q Curve (At Rated Voltage)

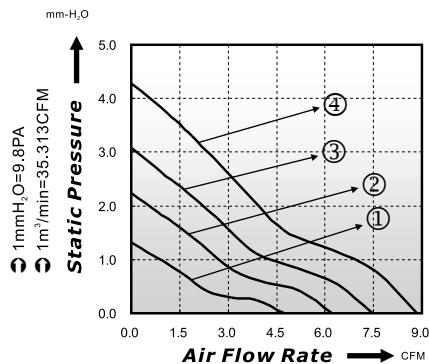

■ Dimensions Drawing

Unit: (mm)

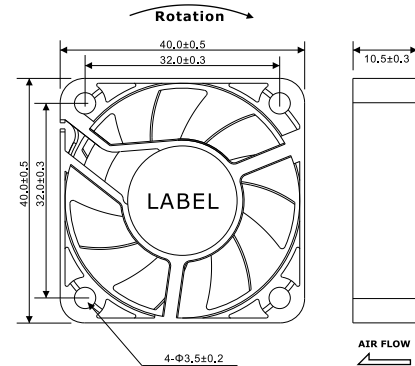

Model No	Bearing (*)	Rated Voltage (VDC)	Rated Current (A)	Power Consumption (Watts)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mmH ₂ O)	Noise (dBA)	Curve
ED04010-05L*	○ ● ⊖	5	0.11	0.55	4000	4.75	1.32	20.3	1
ED04010-05M*	○ ● ⊖	5	0.13	0.65	5000	6.22	2.24	23.6	2
ED04010-05H*	○ ● ⊖	5	0.16	0.80	6000	7.47	3.09	26.7	3
ED04010-05HH*	○ ● ⊖	5	0.27	1.35	7000	8.85	4.28	30.9	4
ED04010-12L*	○ ● ⊖	12	0.06	0.72	4000	4.75	1.32	20.3	1
ED04010-12M*	○ ● ⊖	12	0.08	0.96	5000	6.22	2.24	23.6	2
ED04010-12H*	○ ● ⊖	12	0.10	1.20	6000	7.47	3.09	26.7	3
ED04010-12HH*	○ ● ⊖	12	0.12	1.44	7000	8.85	4.28	30.9	4
ED04010-24L*	○ ● ⊖	24	0.06	1.44	4000	4.75	1.32	20.3	1
ED04010-24M*	○ ● ⊖	24	0.07	1.68	5000	6.22	2.24	23.6	2
ED04010-24H*	○ ● ⊖	24	0.09	2.16	6000	7.47	3.09	26.7	3
ED04010-24HH*	○ ● ⊖	24	0.12	2.88	7000	8.85	4.28	30.9	4

* Bearing Type: ○ Sleeve ● Two Ball ⊖ Hydro-Dynamic