


40x40x28mm

Model D




P-Q Curve (At Rated Voltage)

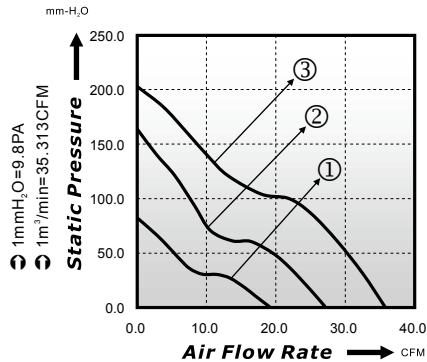

Dimensions Drawing

Unit: (mm)

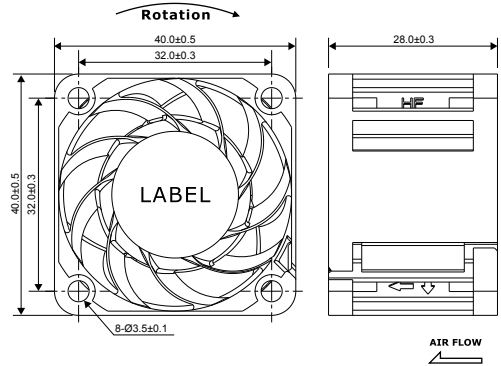

Model No	Bearing (*)	Rated Voltage (VDC)	Rated Current (A)	Power Consumption (Watts)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mmH ₂ O)	Noise (dBA)	Curve
ED04028-12LB	●	12	0.60	7.20	20000	19.20	82.5	54.5	1
ED04028-12MB	●	12	1.08	12.96	28000	27.10	164	62.0	2
ED04028-12HB	●	12	2.40	28.80	36500	35.80	202.9	68.0	3
ED04028-24LB	●	24	0.30	7.20	20000	19.20	82.5	54.5	1
ED04028-24MB	●	24	0.54	12.96	28000	27.10	164	62.0	2
ED04028-24HB	●	24	1.20	28.80	36500	35.80	202.9	68.0	3

* Bearing Type: ○ Sleeve ● Two Ball ⊙ Hydro-Dynamic