


# 70x70x10mm


■ Model T



## ■ P-Q Curve (At Rated Voltage)

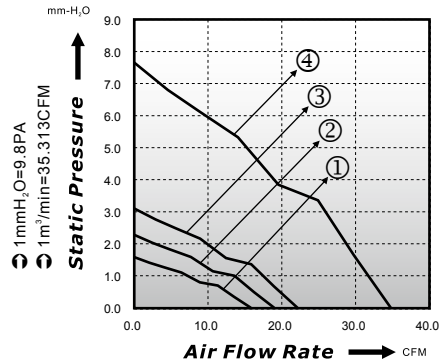

## ■ Dimensions Drawing

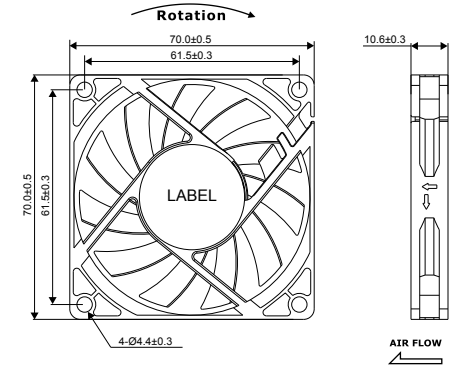

Model No	Bearing (*)	Rated Voltage (VDC)	Rated Current (A)	Power Consumption (Watts)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mmH <sub>2</sub> O)	Noise (dBA)	Curve
ED07010-05L*	○ ● ⊖	5	0.35	1.75	2500	15.8	1.58	26.2	1
ED07010-05M*	○ ● ⊖	5	0.40	2.00	3000	19.0	2.28	30.8	2
ED07010-05H*	○ ● ⊖	5	0.50	2.50	3500	22.1	3.10	34.3	3
ED07010-12L*	○ ● ⊖	12	0.25	3.00	2500	15.8	1.58	26.2	1
ED07010-12M*	○ ● ⊖	12	0.30	3.60	3000	19.0	2.28	30.8	2
ED07010-12H*	○ ● ⊖	12	0.35	4.20	3500	22.1	3.10	34.3	3
ED07010-12HH*	○ ● ⊖	12	0.50	6.00	5500	34.8	7.66	43.2	4

\* Bearing Type: ○ Sleeve ● Two Ball ⊖ Hydro-Dynamic