


■ Case




■ P-Q Curve (At Rated Voltage)

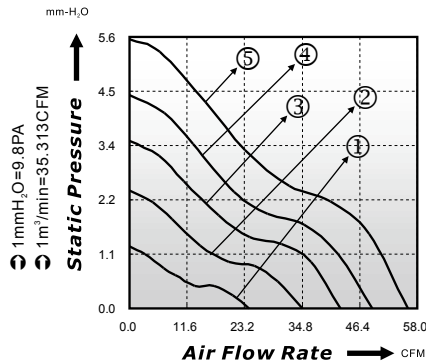

■ Dimensions Drawing

Unit: (mm)

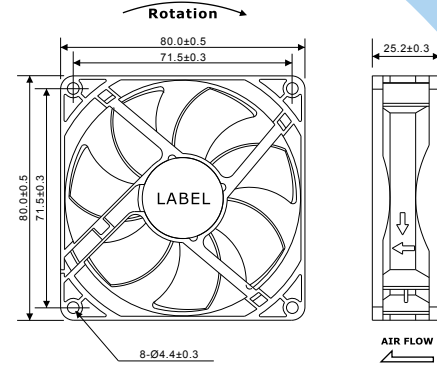

Model No	Bearing (*)	Rated Voltage (VDC)	Rated Current (A)	Power Consumption (Watts)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mmH ₂ O)	Noise (dBA)	Curve
ED08025-05L*	○ ● ⊖	5	0.20	1.00	2500	34.89	2.44	29.2	2
ED08025-05M*	○ ● ⊖	5	0.45	2.25	3000	42.55	3.46	34.3	3
ED08025-12L*	○ ● ⊖	12	0.15	1.80	1800	24.07	1.27	22.9	1
ED08025-12M*	○ ● ⊖	12	0.25	3.00	3000	42.55	3.46	34.3	3
ED08025-12H*	○ ● ⊖	12	0.35	4.20	3500	48.86	4.40	39.3	4
ED08025-12HH*	○ ● ⊖	12	0.45	5.40	4000	56.11	5.55	42.3	5
ED08025-24L*	○ ● ⊖	24	0.09	2.16	2500	34.89	2.44	29.2	2
ED08025-24M*	○ ● ⊖	24	0.25	6.00	3000	42.55	3.46	34.3	3
ED08025-24H*	○ ● ⊖	24	0.35	8.40	3500	48.86	4.40	39.3	4
ED08025-24HH*	○ ● ⊖	24	0.40	9.60	4000	56.11	5.55	42.3	5
ED08025-48L*	○ ● ⊖	48	0.10	4.80	2500	34.89	2.44	29.2	2
ED08025-48M*	○ ● ⊖	48	0.15	7.20	3000	42.55	3.46	34.3	3
ED08025-48H*	○ ● ⊖	48	0.20	9.60	3500	48.86	4.40	39.3	4
ED08025-48HH*	○ ● ⊖	48	0.25	12.00	4000	56.11	5.55	42.3	5

* Bearing Type: ○ Sleeve ● Two Ball ⊖ Hydro-Dynamic