


80x80x25mm

Model J




P-Q Curve (At Rated Voltage)

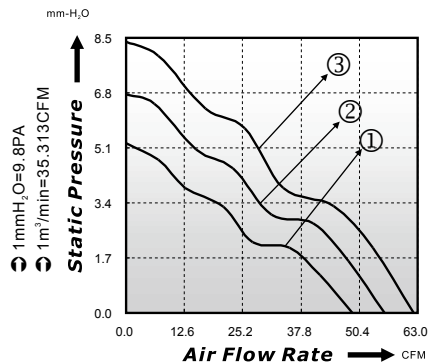

Dimensions Drawing

Unit: (mm)

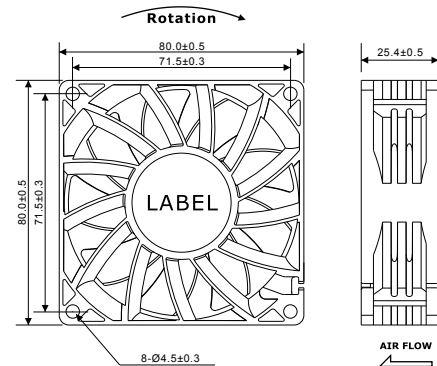

Model No	Bearing (*)	Rated Voltage (VDC)	Rated Current (A)	Power Consumption (Watts)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mmH ₂ O)	Noise (dBA)	Curve
ED08025-12LB	●	12	0.45	5.40	3500	48.85	5.24	45.6	1
ED08025-12MB	●	12	0.65	7.80	4000	55.93	6.76	49.5	2
ED08025-12HB	●	12	0.75	9.00	4500	62.14	8.38	52.7	3
ED08025-24LB	●	24	0.26	6.24	3500	48.85	5.24	45.6	1
ED08025-24MB	●	24	0.34	8.16	4000	55.93	6.76	49.5	2
ED08025-24HB	●	24	0.45	10.8	4500	62.14	8.38	52.7	3
ED08025-48LB	●	48	0.21	10.08	3500	48.85	5.24	45.6	1
ED08025-48MB	●	48	0.31	14.88	4000	55.93	6.76	49.5	2
ED08025-48HB	●	48	0.41	19.68	4500	62.14	8.38	52.7	3

* Bearing Type: ○ Sleeve ● Two Ball ⊖ Hydro-Dynamic