


92x92x15mm

Model J




P-Q Curve (At Rated Voltage)

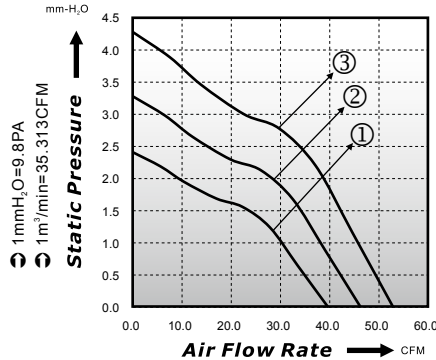

Dimensions Drawing

Unit: (mm)

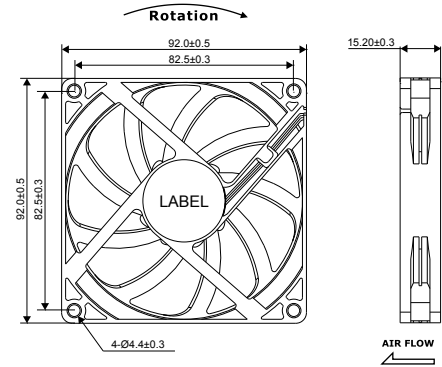

Model No	Bearing (*)	Rated Voltage (VDC)	Rated Current (A)	Power Consumption (Watts)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mmH ₂ O)	Noise (dBA)	Curve
ED09215-12L*	○ ● ⊖	12	0.20	2.4	3000	39.67	2.41	37.4	1
ED09215-12M*	○ ● ⊖	12	0.35	4.2	3500	46.28	3.28	40.7	2
ED09215-12H*	○ ● ⊖	12	0.55	6.6	4000	52.89	4.28	43.6	3
ED09215-24L*	○ ● ⊖	24	0.20	4.8	3000	39.67	2.41	37.4	1
ED09215-24M*	○ ● ⊖	24	0.30	7.2	3500	46.28	3.28	40.7	2
ED09215-24H*	○ ● ⊖	24	0.40	9.6	4000	52.89	4.28	43.6	3

* Bearing Type: ○ Sleeve ● Two Ball ⊖ Hydro-Dynamic