EA2589CM Series.

Size : ø254 x 89
Unit : mm

* Metal Impeller

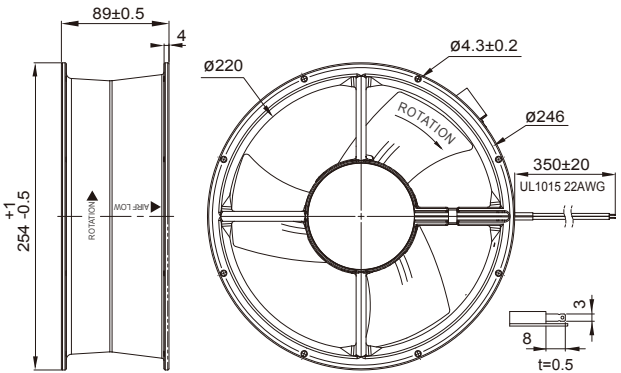

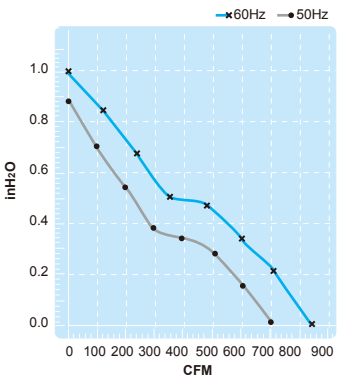

Thermally-Protected

Terminal or Lead Wire Type

Cl. F

E314708 E314708

Spec. / Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m^3/min.	Maximum Air Flow CFM	Maximum Pressure mmH_2O	Maximum Pressure $InchH_2O$	Noise dB	Weight kg
EA2589CM-11H	115	50	62	0.70	1.92	3800	20.1	709	22.5	0.89	66	2.7
		60	80	0.70	1.87	3250	23.8	841	25.3	1.00	70	
EA2589CM-23H	230	50	62	0.35	0.81	2800	20.1	709	22.5	0.89	66	2.7
		60	80	0.35	0.80	3250	23.8	841	25.3	1.00	70	
EA2589CM-11M	115	50	45	0.40	0.64	2500	17.8	627	13.3	0.52	64	2.7
		60	60	0.52	0.66	2650	19.0	671	12.4	0.49	65	
EA2589CM-23M	230	50	45	0.20	0.32	2500	17.8	627	13.3	0.52	64	2.7
		60	60	0.26	0.33	2650	19.0	671	12.4	0.49	65	