EA1555CM Series.

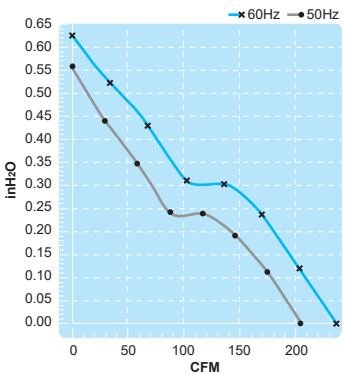



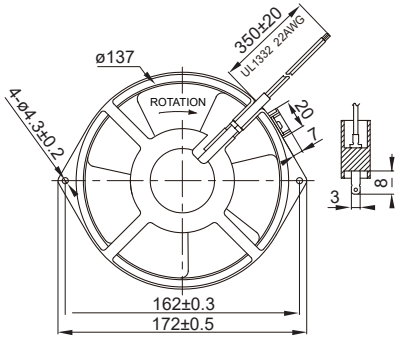

Size : 172 x 150 x 55
Unit : mm

* Metal Impeller

E314708 E314708

Terminal or Lead Wire Type

Thermally-Protected

Model \ Spec.	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m³/min.	Maximum Air Flow CFM	Maximum Pressure mmH2O	Maximum Pressure InchH₂O	Noise dB	Weight kg
EA1555CM-10H	100	50	40	0.58	**1.03**	2800	5.5	195	14	0.55	49	1.10
		60	38	0.50	**0.89**	3250	6.5	230	16	0.63	53	
EA1555CM-11H	115	50	42	0.52	**0.88**	2800	5.5	195	14	0.55	49	1.10
		60	42	0.47	**0.75**	3250	6.5	230	16	0.63	53	
EA1555CM-20H	200	50	40	0.29	**0.50**	2800	5.5	195	14	0.55	49	1.10
		60	38	0.26	**0.45**	3250	6.5	230	16	0.63	53	
EA1551CM-23H	230	50	42	0.25	**0.43**	2800	5.5	195	14	0.55	49	1.10
		60	42	0.23	**0.37**	3250	6.5	230	16	0.63	53	